Negotiated rate Comparitive Statement

Name of Work: Pot hole filling in Jalahalli surrounding areas of Bhovi Colony Khata nagara Sidhartha nagara Jalahalli colony in ward no 16 Jalahalli

Tender Notification No: EE/RRND/Tend/02/2020-21 Date: 10.06.2020

Indet No: BBMP/2020-21/RD/WORK_INDENT42932

Sl No.	Item Description	Unit	Quantity	As per Estimate Rate (PWD SR 2018-19 B'lore Circle,		Rates quoted by S SANTHOSH KUMAR		Negotiated Rates quoted by S SANTHOSH KUMAR	
				Rate	Amount in Rs.	Rate in Rs	Amount in Rs	Rate in Rs	Amount in Rs
1	KSRRB 300-1. Earthwork excavation by manual means in hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications.	Cum	367.35	285.14	104746.18	305.00	112041.75	299.00	109837.65
2	Providing, laying , spreading and compacting graded stones aggregate to wet mix macadam specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications.	Cum	275.51	2001.28	551372.65	2141.00	589866.91	2098.00	578019.98
3	Filling potholes and patch Repairs with Bituminous Concrete, 40mm. Removal of all failed material, trimming of completed excavation to provid firm vertical faces, clearing of surface, painting of tack coat on the sides and base of excavation as per clause 500.3, back filling pot holes with hot bituminous material as per clause 500.4, compacting, trimming and finishing the surface to from a smooth continuous surface, all as per clause 3004.2	Sqm	1836.76	325.42	597718.44	348.00	639192.48	341.00	626335.16
					1253837.27		**1341101.14**		**1314192.79**
% when compared to PWD SR 2018-19						**+6.96%Above**		**+4.81%Above**	

Executive Engineer
Rajarajeshwari nagar Division
BBMP

ಹಬ್ಬುವರ ದಂಗೆ ?

ಅನುಮೋದಿಸಿ ಕಾ ಸಂದೇಶ ನೀಡಲು ಕೋರುತ್ತಿದ್ದೇನೆ.

S.

Scanned with CamScanner

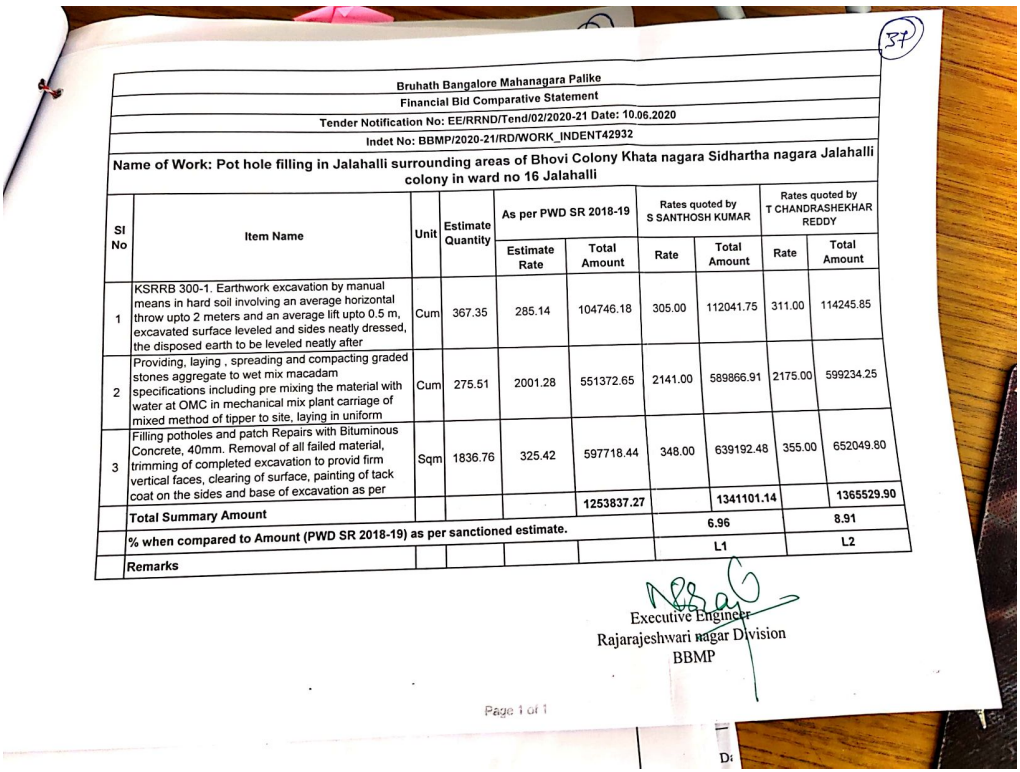

Bruhath Bangalore Mahanagara Palike

Financial Bid Comparative Statement

Tender Notification No: EE/RRND/Tend/02/2020-21 Date: 10.06.2020

Indet No: BBMP/2020-21/RD/WORK_INDENT42932

Name of Work: Pot hole filling in Jalahalli surrounding areas of Bhovi Colony Khata nagara Sidhartha nagara Jalahalli colony in ward no 16 Jalahalli

Sl No	Item Name	Unit	Estimate Quantity	As per PWD SR 2018-19		Rates quoted by S SANTHOSH KUMAR		Rates quoted by T CHANDRASHEKHAR REDDY	
				Estimate Rate	Total Amount	Rate	Total Amount	Rate	Total Amount
1	KSRRB 300-1. Earthwork excavation by manual means in hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after	Cum	367.35	285.14	104746.18	305.00	112041.75	311.00	114245.85
2	Providing, laying , spreading and compacting graded stones aggregate to wet mix macadam specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform	Cum	275.51	2001.28	551372.65	2141.00	589866.91	2175.00	599234.25
3	Filling potholes and patch Repairs with Bituminous Concrete, 40mm. Removal of all failed material, trimming of completed excavation to provid firm vertical faces, clearing of surface, painting of tack coat on the sides and base of excavation as per	Sqm	1836.76	325.42	597718.44	348.00	639192.48	355.00	652049.80
	Total Summary Amount				**1253837.27**		**1341101.14**		**1365529.90**
	% when compared to Amount (PWD SR 2018-19) as per sanctioned estimate.						**6.96**		**8.91**
	Remarks						**L1**		**L2**

Executive Engineer
Rajarajeshwari nagar Division
BBMP

Page 1 of 1

Scanned with CamScanner